

VITTORIA MAIOLICA


WOOD STOVE



Vittoria is the ideal solution for those looking for utility, solidity, aesthetics in a small footprint. Its vertically developed combustion chamber allows you to admire the charm of a wood fire. At each load of wood the innovative SMOKE BY PASS device drastically reduces the release of smokes in the room.

Heatable area

115 m².






- 1 - Smoke outlet Ø 130mm
- 2 - Enamelled cast iron top
- 3 - Smoke by-pass technology reduces the smoke outlet to the living zone before every wood load
- 4 - Precious handmade majolica by master craftsmen
- 5 - Terziary air modulation devices
- 6 - Cast iron firebox door
- 7 - Cast iron firebox (HxWxD - 439x362x384)
- 8 - Loading opening (WxH - 315x470)
- 9 - Cool touch door handle
- 10 - Secondary air modulation devices
- 11 - Primary air modulation devices
- 12 - Riddle grate lever
- 13 - The refined raised base facilities the cleaning operations



DIMENSIONS

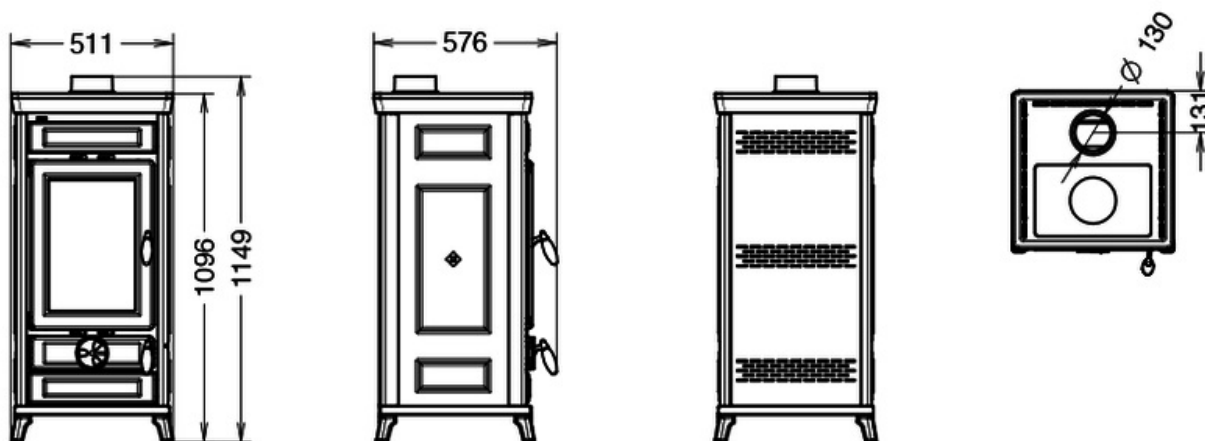

TECHNICAL DATA

| | |
|-------------------------------------|--------------|
| DIMENSIONS (HXWXD) | 1133X511X573 |
| WEIGHT (KG) | 189 |
| HEATABLE AREA (M ²)*A*C | 115 |
| EFFICIENCY UP TO MAX (%)*A | 85,3% |
| ENERGY CLASS | A+ |
| POWER TO THE HEART (KW)*A | 15,0 |
| RATED POWER (KW)*A | 12,8 |
| POWER TO THE WATER (KW)*A | - |

| | |
|---|------|
| RADIATION (KW)*A | 15,0 |
| HOURLY PELLETT CONSUMPTION (KG/H)*A | - |
| WOOD HOURLY CONSUMPTION (KG/H)*A | 3,5 |
| PELLET HOPPER CAPACITY (KG)*A | |
| WARM AIR DUCTING | - |
| MAXIMUM SINGLE DUCTING OUTLET (M) | - |
| PATENTED BURNER PELLETPOWER® | |
| ROOM VENTILATION | - |
| PRIMARY AIR FROM OUTSIDE | - |
| CO EMISSIONS (MG/M ³ ; 13% OF O ₂)*A | 881 |
| CO EMISSIONS (MG/M ³ ; 10% OF O ₂)*A | |
| DUST EMISSIONS (MG/M ³ ; 13% OF O ₂)*A | 14,1 |
| DUST EMISSIONS (MG/M ³ ; 10% OF O ₂)*A | |
| SILENCE (DB) | - |
| REMOTE CONTROL | - |
| RADIO CONTROL WITH ROOM TEMPERATURE THERMOSTAT | - |
| WEEKLY PROGRAMMER (3 DAILY LIGHTING) | - |
| «SMART INFO» FUNCTION | - |
| SYSTEM CIRCULATING PUMP | - |
| EXPANSION TANK | - |
| OVER PRESSURE VALVE | - |
| FLUE GASEXHAUST DIAMETER (MM) | 130 |
| MIN. FLUE DRAUGHT PRESSURE (PA) | 12 |
| ELECTRIC CONSUMPTION (WATT) | - |
| HIGH TEMPERATURE SAFETY THERMOSTAT | - |

*A EMISSIONS AND PERFORMANCE DATA MAY CHANGE ACCORDING TO THE FUEL USED. THE VALUES OF PELLETT PRODUCTS HAVE BEEN OBTAINED BY USING CERTIFIED FUEL ACCORDING TO EN 14961-2 A1-A2 NORM. WOOD LOGS PRODUCTS VALUES MAY VARY ACCORDING TO THE TYPE AND QUALITY OF THE WOOD LOGS USED.

*B PROVISIONAL DATA UNDER CERTIFICATION

*C IMPORTANT: WHEN CALCULATING THE VOLUME OF THE "HEATED AREA" SOME RELEVANT ASPECTS MUST BE CONSIDERED: INSULATION OF THE BUILDING (ENERGY CLASS), POSITION OF THE HEATER, CLIMATIC AREA AND MORE ASPECTS THAT CAN AFFECT THE VALUES OF PERFORMANCE. REPORTED DATA HAVE BEEN CALCULATED ON THE BASE OF ROOF NOT HIGHER THAN 3 MTS.

THE MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES WITHOUT PREVIOUS NOTICE.

THERMOROSSI S.p.A.

Via Grumolo, 4 | 36011 Arsiero (VI) | Italy | E-mail: info@thermorossi.it

Tel: 800.44.88.77 | Fax: 0445 741657 | P.IVA 00168470243 | Iscr. REA99797 Vicenza | Cap. Sociale di 156,000,00 I.v.

