

# PVERTICAL

## PELLET STOVE




Pvertical is an elegant, modern, with air ducting fireplace. The innovative design of the vertical tube heat exchanger THERMOCORE® allows the appliance to achieve both a very high performance and maximum energy saving. The front door and the pellet burning pot, constructed in heavy cast iron, add an extra degree of reliability and longevity. Equipped with simplified cleaning system EASY CLEANING and with removable ash pan as standard. Easy and quick to install thanks to the support kit.

Heatable area

103 m<sup>2</sup>.



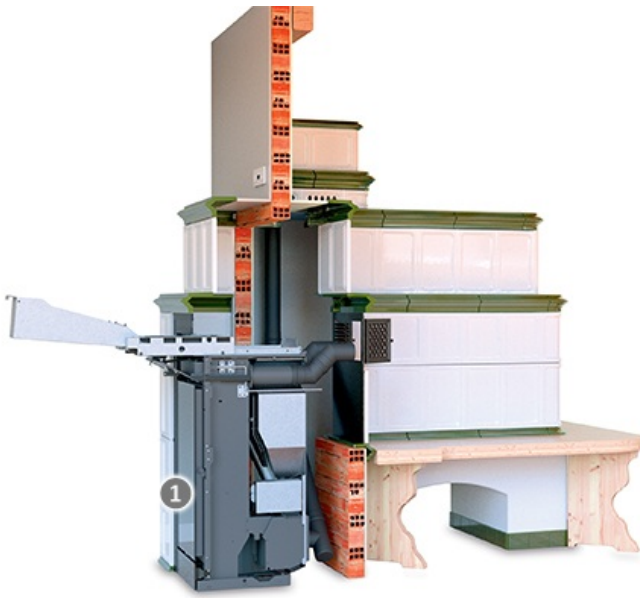

1 - Screen-printed ceramic glass and cast iron firebox door



## OPTIONAL ACCESSORIES

---



## TECHNICAL DATA

DIMENSIONS (HXWXD)	1092X437X557
WEIGHT (KG)	70
HEATABLE AREA (M <sup>2</sup> )	0
EFFICIENCY UP TO MAX (%)	0,0%
ENERGY CLASS	-
POWER TO THE HEART (KW)	0 - 0
RATED POWER (KW)	0 - 0
POWER TO THE WATER (KW)	-
RADIATION (KW)	-
HOURLY PELLETT CONSUMPTION (KG/H)	0,6 - 1,5
WOOD HOURLY CONSUMPTION (KG/H)V	-
PELLET HOPPER CAPACITY (KG)	14,00
WARM AIR DUCTING	-
MAXIMUM SINGLE DUCTING OUTLET (M)	-
PATENTED BURNER PELLETPOWER®	-
ROMM VENTILATION	SI
PRIMARY AIR FROM OUTSIDE	OPT

CO EMISSIONS (MG/M <sup>3</sup> ; 13% DI O <sub>2</sub> )	94
CO EMISSIONS (MG/M <sup>3</sup> ; 10% DI O <sub>2</sub> )	-
DUST EMISSIONS (MG/M <sup>3</sup> ; 13% DI O <sub>2</sub> )	29,2
DUST EMISSIONS (MG/M <sup>3</sup> ; 10% DI O <sub>2</sub> )	-
SILENCE(DB)	36,00
REMOTE CONTROL	SI
RADIO CONTROL WITH ROOM TEMPERATURE THERMOSTAT	-
WEEKLY PROGRAMMER (3 DAILY LIGHTING)	SI
SMART INFO FUNCTION	-
SYSTEM CIRCULATING PUMP	-
EXPANSION TANK	-
OVER PRESSURE VALVE	SI
FLUE GASEXHAUST DIAMETER (MM)	80
MIN. FLUE DRAUGHT PRESSURE (PA)	12
ELECTRIC CONSUMPTION (WATT)	66-271
HIGH TEMPERATURE SAFETY THERMOSTAT	SI

THERMOROSSI S.p.A.

Via Grumolo, 4 | 36011 Arsiero (VI) | Italy | E-mail: [info@thermorossi.it](mailto:info@thermorossi.it)

Tel: 800.44.88.77 | Fax: 0445 741657 | P.IVA 00168470243 | Iscr. REA99797 Vicenza | Cap. Sociale di 156,000,00 I.v.